


Corrosion Proof Single Inlet Plastic Fans High Pressure

- Completely made of Polypropylene.
- Polypropylene Centrifugal impeller with forward curved blades.

- The material and design make the fan corrosion and spark proof.
- For speed controllers see pages 320-322.
- **Performance curves for all fans.**

Application: They are suitable for oxidant gas suction, installation in corrosive environments such as chemical industries, laboratories, biological wastewater treatment, underground and outdoors etc.

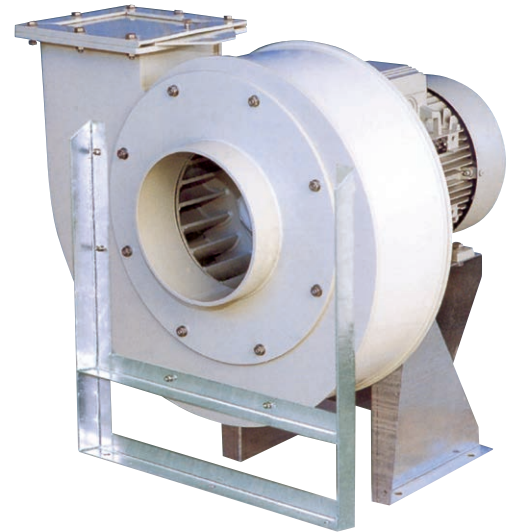

1400 RPM

Type	Power HP	Inlet Flange Ø mm	Air flow m³/h	Static Pressure mm H ₂ O	Noise Level dB (A)	Price
PLAST - 16/4 - HP	0,50	160	800	42	63	⌘
PLAST - 20/4 - HP	1,00	200	1.450	63	69	⌘
PLAST - 22/4 - HP	1,50	225	2.300	77	71	⌘
PLAST - 28/4 - HP	4,00	280	4.000	122	75	⌘
PLAST - 30/4 - HP	7,50	315	6.500	175	76 - 77	⌘
PLAST - 40/4 - HP	25,00	400	13.000	250	78 - 82	⌘
PLAST - 45/4 - HP	40,00	450	17.000	334	82 - 87	⌘

2800 RPM

Type	Power HP	Inlet Flange Ø mm	Air flow m³/h	Static Pressure mm H ₂ O	Noise Level dB (A)	Price
PLAST - 16/2 - HP	2,00	160	1.500	178	72	⌘
PLAST - 20/2 - HP	4,00	200	2.300	250	80	⌘
PLAST - 22/2 - HP	10,00	225	4.000	330	86	⌘

