


Axial Fans R Series 1400 RPM

- Excellent quality axial fans. Housing of Sheet steel.
- **High quality 4 pole** external motor with bearings guaranteed for 30.000 hours life expectancy.
- Working temperature: -30°C to 50°C.
- **IP 44, IP 54.**
- Class F, B.
- Thermal protection: All motors are fitted with internal thermal protection (Klixon) to avoid overheating.
- Fans include protection guard.
- Steel impeller for diameters 300 to 350 mm, and aluminium for diameters 400 to 630 mm.
- Speed controllable.
- Aluminum or plastic gravity Grills available for all fan models.

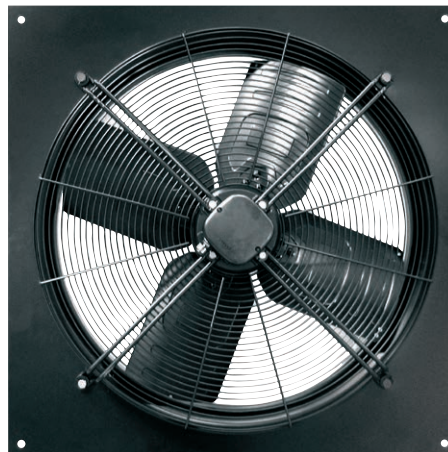


Application: Suitable for large halls, greenhouses, pig farms, warehouses, industrial instalations, parkings etc.

R 1400 230 V Series

Type	Ø (mm)	Power (W)	Air flow (m³/h)	Noise Level dB (A)	Amperage (A)	Price
R11P - 3530P - 4M	350	128	2.900	67	0,56	€ 352,00
R11P - 4035P - 4M	400	245	4.300	73	1,15	€ 454,00
R11P - 4530P - 4M	450	310	5.500	74	1,40	€ 475,00
R13P - 5030P - 4M	500	545	7.800	82	2,40	€ 818,00

Σειρά R 1400 400 V

Type	Ø (mm)	Power (W)	Air flow (m³/h)	Noise Level dB (A)	Amperage (A)	Price
R09P - 3532P - 4T	350	128	2.800	72	0.29	€ 371,00
R11P - 4035P - 4T	400	250	4.500	75	0.52	€ 499,00
R13P - 4535P - 4T	450	465	6.200	80	0.95	€ 511,00

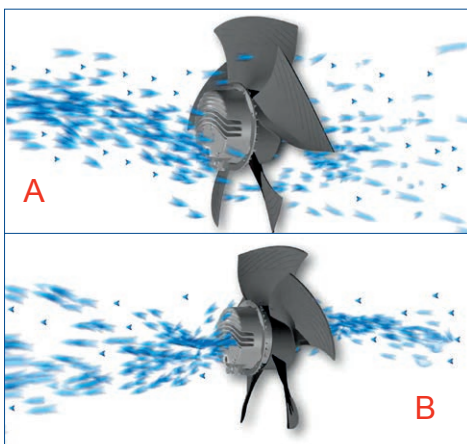

Airflow direction from motor to impeller (blowing) (A).

On request:

Airflow direction from impeller to motor (sucking) (B).

With energy-saving motor. This especially applies to devices with a high duty cycle, such as air conditioning and refrigeration systems.

Contact our technical department for more information.

Accessories



AK 20 speed controller




400V Input Voltage Inverter



VK Series gravity grilles

Dimensions R 1400 RPM series

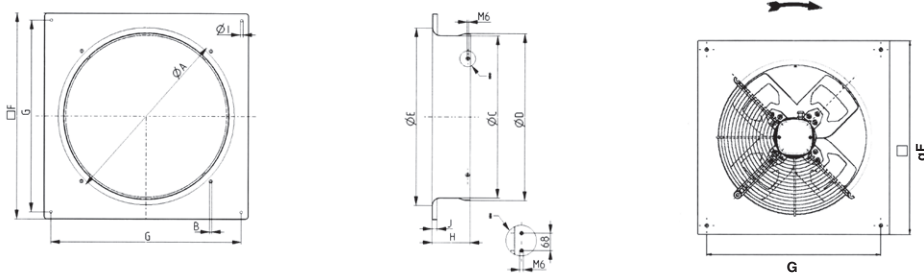

Dimensions

Ø (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	qF (mm)	G (mm)	H (mm)	I (mm)	J (mm)
500	565	M8	504	507	534	655	615	45	11	15
450	515	M8	452	455	482	575	535	45	11	15
400	455	M8	403	406	433	540	490	45	11	15
350	422	M6	360	363	390	485	435	45	11	15

R 1400 RPM Series Performance Curves

