


## Duct (In-Line) Fans for Round Section Duct Systems ACM Series

- Available in six sizes : 100mm,125mm,150mm,200mm,250mm,315mm.
- Air flow 220 m<sup>3</sup>/h to 2.350 m<sup>3</sup>/h.
- Single direction, two speed selectable motor, Class B.
- Designed to meet IP44.
- Maintenance of the fan without disconnecting it from the air duct network.
- Ideal for installation that needs small dimension for the fan.
- All motors are fitted with Standard Thermal Overload Protection. (S.T.O.P.).
- Motors speed can be controllable at the high speed setting. Speed control can be with 2speed switch or AK-20 dimmer.
- All models except the ACM 135 have the ability to cooperate with timer, humidity and air quality sensor.
- Designed for ambient temperatures - 30°C to 50°C.



ACM Series				
Type	Power (max) (W)	Air flow (max) (m <sup>3</sup> /h)	Noise Level dB (A)	Price
ACM 100	24	220	23	€ 162,00
ACM 125	30	292	24	€ 168,00
ACM 150	66	458	35	€ 208,00
ACM 200	152	810	55	€ 238,00
ACM 250	145	1.620	52	€ 778,00
ACM 315	270	2.350	56	€ 880,00

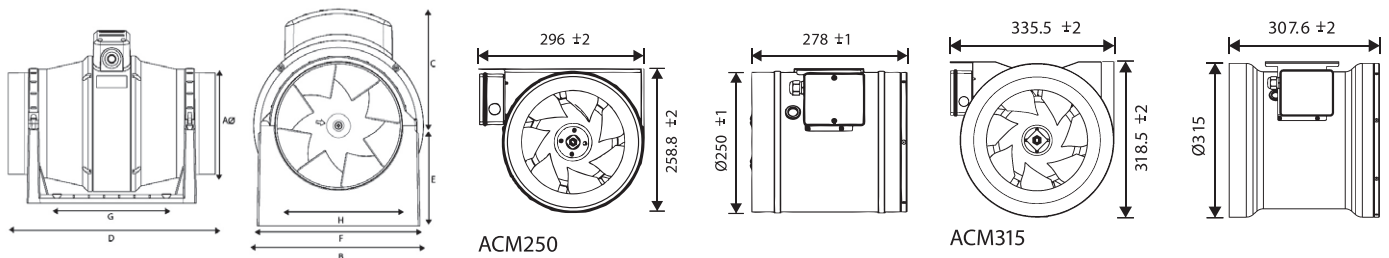


Dimensions								
Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)
ACM 100	97	178	124	298	96	168	120	153,5
ACM 125	122	178	124	259	96	168	120	153,5
ACM 150	147	200	138	350	118	192	162	178
ACM 200	197	207	135	300	130	140	100	94

### Accessories





## ACM Series Performance Curves




100/125mm

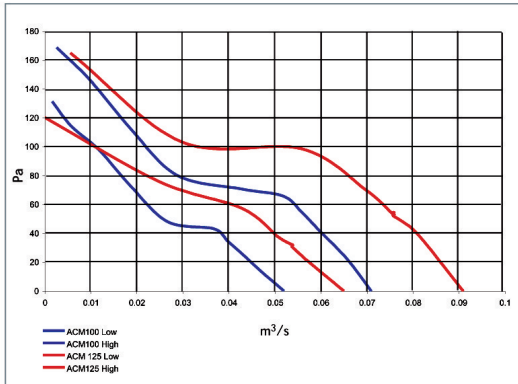

150/200mm

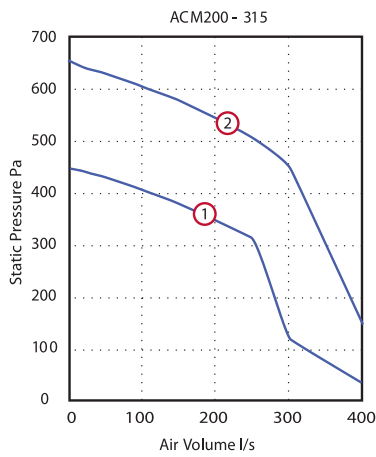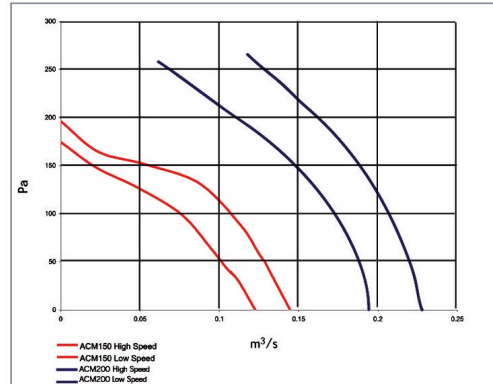

**ACM 250 & 315**  
housing made of  
galvanized pressed steel.

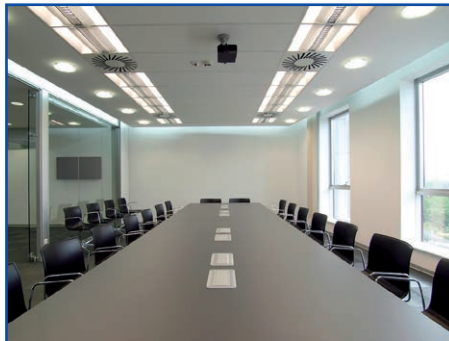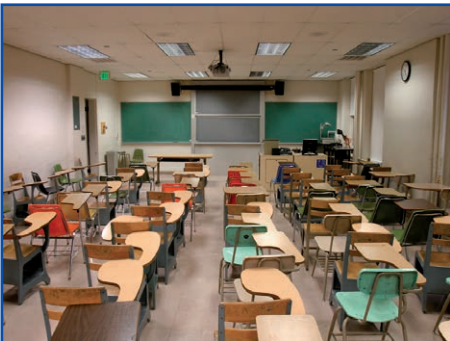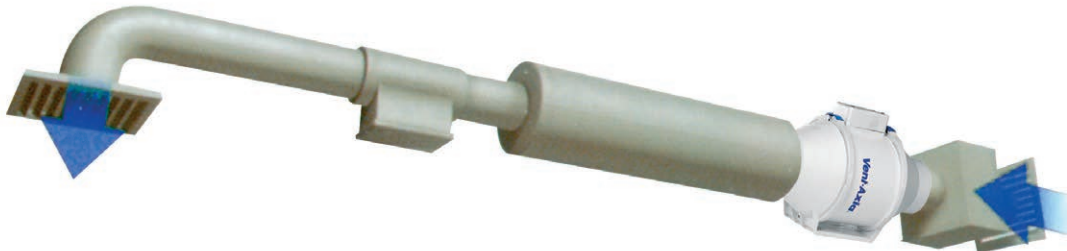


### Accessories



Aluminum air ducts



Back-Draught Shutters



Round Cross Section Rotary Diaphragm



Manual Dampers



Constant Air Flow Regulars (Dampers)



Sound Barriers