



In-line Circular Duct Fans BDTX Series

- Available sizes: 100,125,150,160, 200, 250,315 and 355 mm.
- The casing is manufactured from powder-coated galvanized sheet steel.
- The impeller with backward blades is powered by the single-phase motor, Class B or Class F.
- Thermal overload protection is available upon request. (Connector box- IP 55).
- Mounting at any angle to wall or ceiling is performed with fastening brackets (supplied with the unit.).
- Directive: EN 60335-1, EN 60335-2-80


Speed controllable.

- Easy maintenance and reliable.
- Suitable for the ventilation of large halls, restaurants and offices.

Application: Suitable for the ventilation of large halls, restaurants, offices etc.

Technical Characteristics BDTX Series

Type	Power (W)	RPM	Air Flow (m³/h)	Noise Level db (A)	Weight (Kg)	Price
BDTX 100	80	2.610	240	50	2,6	€ 158,00
BDTX 125	80	2.325	315	55	2,7	€ 163,00
BDTX 150	85	2.425	420	55	3,2	€ 187,00
BDTX 160	90	2.385	390	55	3	€ 198,00
BDTX 200	122	2.550	870	56	4,8	€ 228,00
BDTX 250	145	2.635	1.150	58	5,3	€ 261,00
BDTX 315	210	2.660	1.750	65	6,9	€ 437,00
BDTX 355	123	1.420	1.300	66	9	€ 490,00

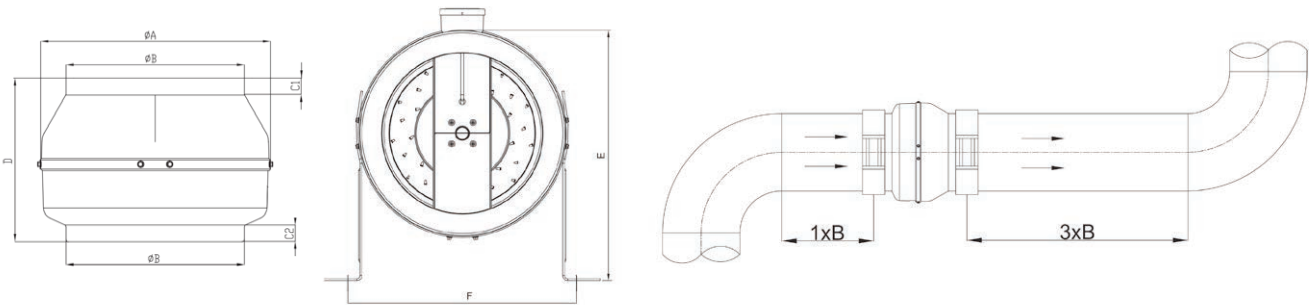

Dimensions Series BDTX (mm)

Type	A	B	C1	C2	D	E	F
BDTX 100	245	97	22	22	197	273	268
BDTX 125	245	122	20	20	188	273	268
BDTX 150	272	147	23	25	192	286	295
BDTX 160	272	157	23	25	192	286	295
BDTX 200	330	196	30	28	230	380	352
BDTX 250	330	247	30	28	227	380	352
BDTX 315	400	313	30	30	285	415	422
BDTX 355	400	352	30	30	378	415	422

In-line Circular Duct Fans

