

## Heat Recovery Units HRV H200 Q Plus Series





Applications: Wide range of dwellings

- The HRV H200 Q Plus continuously running horizontal whole house ventilation unit with heat recovery is independently tested by the BRE. It is ideal for flats due to its low profile.
- Highly efficient heat exchanger, up to 83%. Extremely low Specific Fan Power of 0.55 W/l/s.
- Intelligent controller, quick and easy to commission.
- Fully adjustable boost overrun timer 0-60 minutes; use with nonlatching (momentary) switches to prevent unit from being accidentally left in boost mode.
- Accepts either 204mm x 60mm rectangular ducting, 150mm or 160mm diameter ducting, no adaptors required.
- Intelligent frost protection, stepped reduction of supply air rates prevents HRV unit from freezing.
- Setback facility to reduce ventilation where local regulations allow.
- V free switching control.
- ISO Coarse 65% (G4) filters as standard, ISO ePM1 55% (F7) as an option. Cardboard filters.

Technical Characteristics HRV2.85 Q Plus Series

Type	Air Flow at 100 Pa (m³/h)	Heat Recovery % (up to)	Sound db (A)	Weight (Kg)	Price
H200 Q Plus	300	83%	55	32	Ⓓ

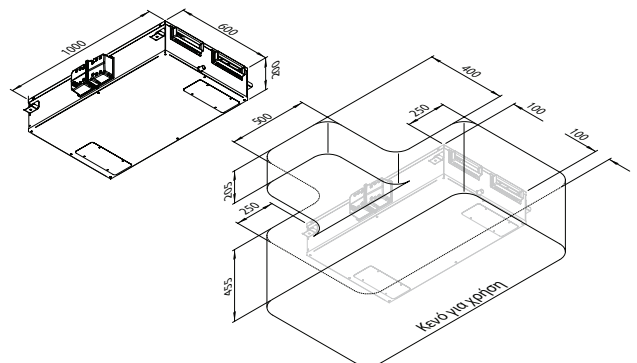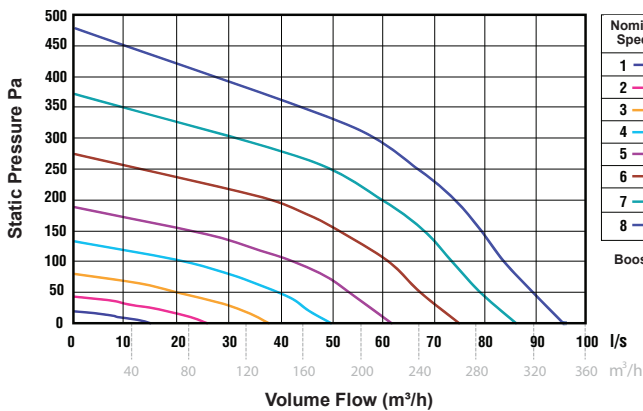

auramode®

Low Vage LCD display with user friendly interface. Available in multiple languages, with 7 day and 8 programmable fan speed settings.