


Glass - Wall Surface Mounted - Ceiling Recessed Mounted Ventilators






COMTKA Wall Fans

- Available in three sizes **150mm (6")**, **230mm (9")** και **300mm (12")**.
- Intake-Extract automatic model with internal thermo-activated shutters.
- The commercial COMGA series of built-in wall fans has been designed for flush fitting into external walls, fitting through most wall thicknesses using zinc coated metal telescopic wall liners.
- Installation is made simple in solid or cavity walls 155-300 mm thick, or in walls up to 553 mm thick using an extension sleeve.
- The extractor fan unit and internal grille are also available separately as they are designed to retro fit into most leading commercial wall fan liners, which minimises the need for making good and redecoration or removal of existing wall liners.
- The internal and external grilles are a single tough moulding. This greatly reduces vandalism and increases building security whilst only 23mm in profile. They have a 50mm flange for a smooth finish, which will blend unobtrusively into most backgrounds. In the 230mm and 300mm models power is provided by a 4 pole single phase induction motor with pre-oiled bearings for a long, maintenance free life. The 150mm version is fitted with a shaded pole motor with ball bearings.
- Models in the range include the standard unit, which has fixed louvres that also provide a natural source of trickle flow ventilation when the fan is switched off. The automatic model with thermoactivated internal backdraught shutters open shortly after the fan has been switched on.
- There is a variable speed and airflow direction option available on the 230mm and 300mm units, using the new stylish Manrose speed controller. This can be flush mounted into a standard single gang 35mm deep metal wall box.
- Designed for heavy-duty and extensive usage, the commercial units provide excellent ventilation in public and commercial sector applications such as hospitals, schools, railway stations, restaurants, public houses, offices, hotels and factories. The units are all manufactured using high impact ABS thermoplastics for strength and durability, aesthetics and easy cleaning. ABS is an easily recyclable material.

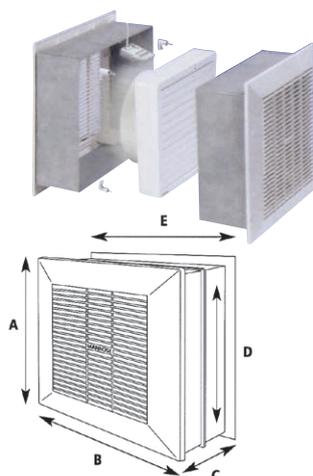

COMTKA Series				
Type	Power (W)	Air flow (m ³ /h)	Noise Level dB (A)	Price
COMTK 150A	20	278	40	€ 284,00
COMTK 230A	41	668	53	€ 425,00
COMTK 300A	68	1.100	60	€ 701,00

COMTKA Series Dimensions						
Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Fixing Hole (mm)
COMTK 150A	310	310	160-290	258	288	263 x 293
COMTK 230A	390	390	160-290	359	366	364 x 371
COMTK 300A	470	470	160-290	440	447	409 x 452



- Speed Controllers
COMTSCVR: Intake-Extract with neon light for **230mm (9")** and **300mm (12")** fans.
COMTSCV: Extract with neon light for **150mm (6")** fans.

Speed Controllers

Type	Price
COMTSCV (Extract)	€ 81,00
COMTSCVR (Intake-Extract)	€ 95,00

