


Ø (mm)	Price (€) / m
63	26,00
75	23,00
80	23,15
90	23,30
100	23,50
110	25,05
120	27,43
125	28,29
130	29,59
140	31,75
150	34,23
160	36,50
170	38,66
180	40,93
190	43,30
200	45,57
225	51,30
230	52,27
250	57,02
270	61,56
300	68,25
350	85,53

## Simple Type Shortening Flexible Aluminum Air Ducts Non Insulated

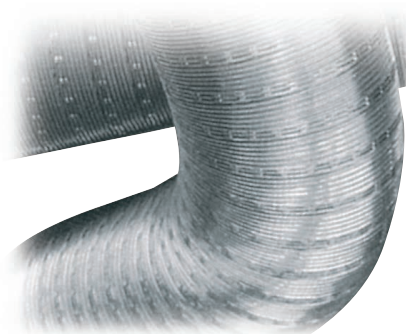

- Operating temperature **700°C**.
- Melting temperature **1500°C**.
- Suitable for fireplace chimneys, boiler chimneys, heating and operation in corrosive oxidizing environments.
- Available in 2 and 3 meters, up to 14m length.

Ø (mm)	Price/ meter
400	⌘
450	⌘

## Not Shortening Stainless Steel Insulated

- Insulated by mineral wool (thickness 30 mm).
- Suitable for energy fireplaces and airconditioning systems.
- Working temperature: up to **200°C**.
- Packaging length: 3 m.



Ø (mm)	Price (€) / m
63	32,50
75	32,50
80	32,50
100	33,54
120	41,18
125	42,84
130	44,40
140	47,62
150	51,16
160	54,38
170	60,88
180	62,14
190	64,36
200	71,48
225	75,96
230	77,52
250	84,28
300	100,76